



## EMT20-LL\*

### Linear light




#### TECHNICAL DETAILS

- Bridglelux 2835 LEDs
- SDCM≤5
- Rated life: 50,000 hours

#### CONSTRUCTION

- Die-casting aluminium housing
- Match ultra-narrow 20 track
- With Prismatic cover, lower UGR

#### OPTIONS

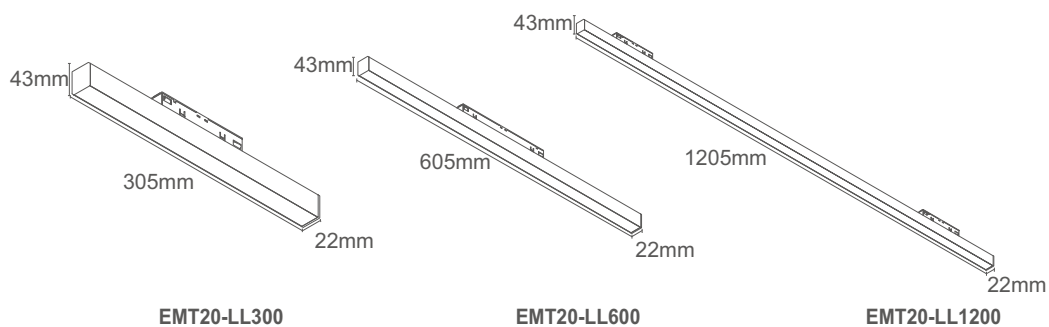


| Model        | Input | Power | CCT   | Lumen  | CRI | BA   |
|--------------|-------|-------|-------|--------|-----|------|
| EMT20-LL300  | DC48V | 7W    | 3000K | 477lm  | ≥90 | 110° |
| EMT20-LL600  | DC48V | 15W   | 3000K | 970lm  | ≥90 | 110° |
| EMT20-LL1200 | DC48V | 30W   | 3000K | 1991lm | ≥90 | 110° |




## PHOTOMETRIC DIAGRAMS

### EMT20-LL300

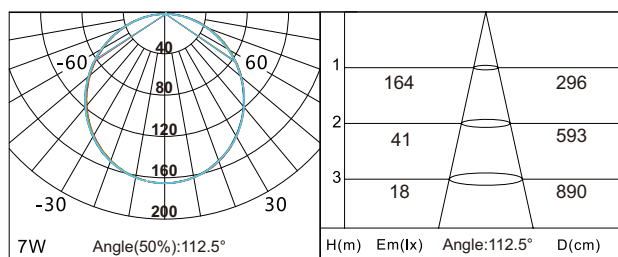

### EMT20-LL600

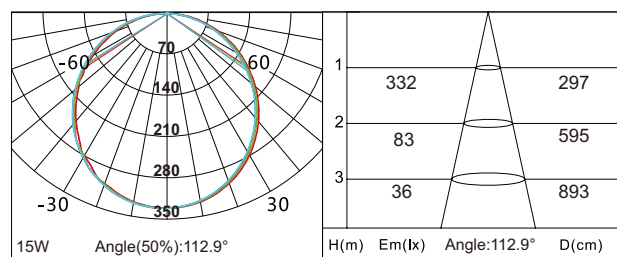

### EMT20-LL1200

