



EMT20-RLL220

Rotative linear light




TECHNICAL DETAILS

- Bridgelux 3030 LEDs
- SDCM≤5
- Rated life: 50,000 hours


CONSTRUCTION

- Die-casting aluminium housing
- Match ultra-narrow 20 track
- With Prismatic cover, lower UGR

OPTIONS



Adjustable range

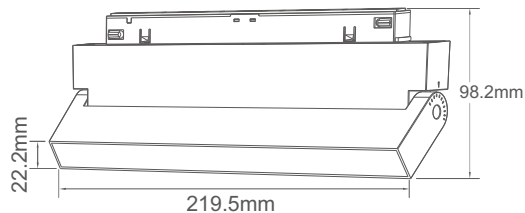

Model	Input	Power	CCT	Lumen	CRI	BA
EMT20-RLL220	DC48V	12W	3000K	407lm	≥90	110°



PHOTOMETRIC DIAGRAMS

