

# Brightness LED Strip

## ■ BRIGHT201

High luminous efficiency, no dark areas, ideal for linear and indirect lighting.





### High brightness

1300lm/m.



### Dotless


Uniform light emission, no dark areas.



### Double layer FPC

Balancing the voltage dropping, heat dissipation and flexibility.

## DIMENSIONS

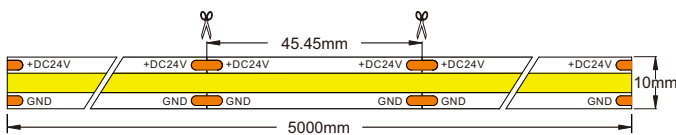

## PRODUCT PARAMETERS

Model	BRIGHT201
Input	DC24V
LED/M	528pcs/M
M/Reel	5M/Reel
LED type	COB
CRI	>90
IP rating	IP20/IP65
Power	15W/M
Lumen/M	1300 lm/M@3000K
CCT	<span>2200K</span> <span>2700K</span> <span>3000K</span> <span>4000K</span> <span>5000K</span> <span>6500K</span> <span>10000K</span> <span>R</span> <span>G</span> <span>B</span>

## IP RATING

IP	IP20	IP65
Section		
Material	None	Inject with silicone tube

\* The IP65 will lead to a 5% brightness/efficiency drop.

## COMPATIBILITY

ON/OFF

Triac

0/1-10V

DALI

PWM

