



EMT20-LL*

Linear light




TECHNICAL DETAILS

- Bridgelux 2835 LEDs
- SDCM≤5
- Rated life: 50,000 hours

CONSTRUCTION

- Die-casting aluminium housing
- Match ultra-narrow 20 track
- With Prismatic cover, lower UGR

OPTIONS

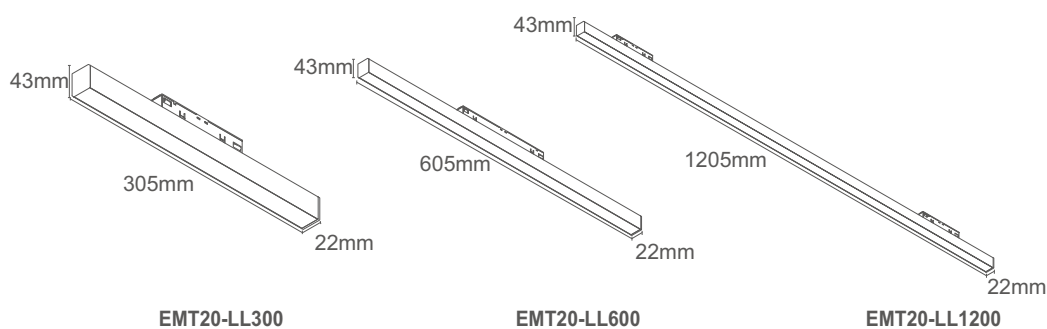


Model	Input	Power	CCT	Lumen	CRI	BA
EMT20-LL300	DC48V	7W	3000K	477lm	≥90	110°
EMT20-LL600	DC48V	15W	3000K	970lm	≥90	110°
EMT20-LL1200	DC48V	30W	3000K	1991lm	≥90	110°




PHOTOMETRIC DIAGRAMS

EMT20-LL300

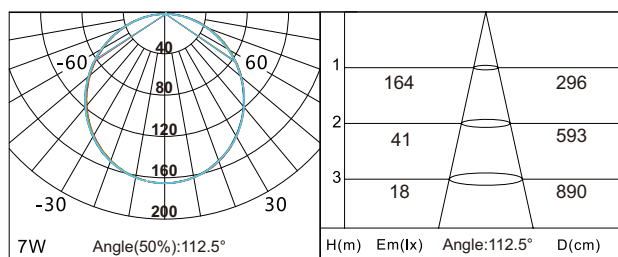

EMT20-LL600

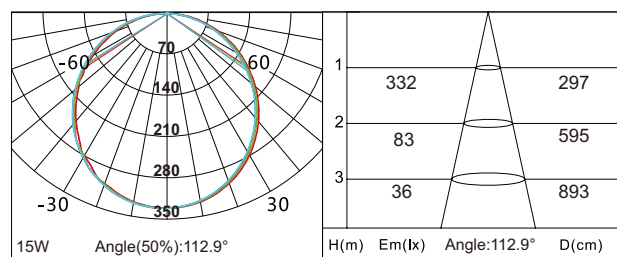

EMT20-LL1200

