


3D Bending Flexible Wall Washer Light

NEON/P2212-WW
NEON/P1616-WW

3D bending flexible wall washer lights are provided with multi optics options and flexible installation along buildings, walls, or columns for uniform illumination, ideal solution for curved or irregular building exteriors, landscape and garden lighting, offering smooth, continuous and efficient lighting that enhances architectural details.



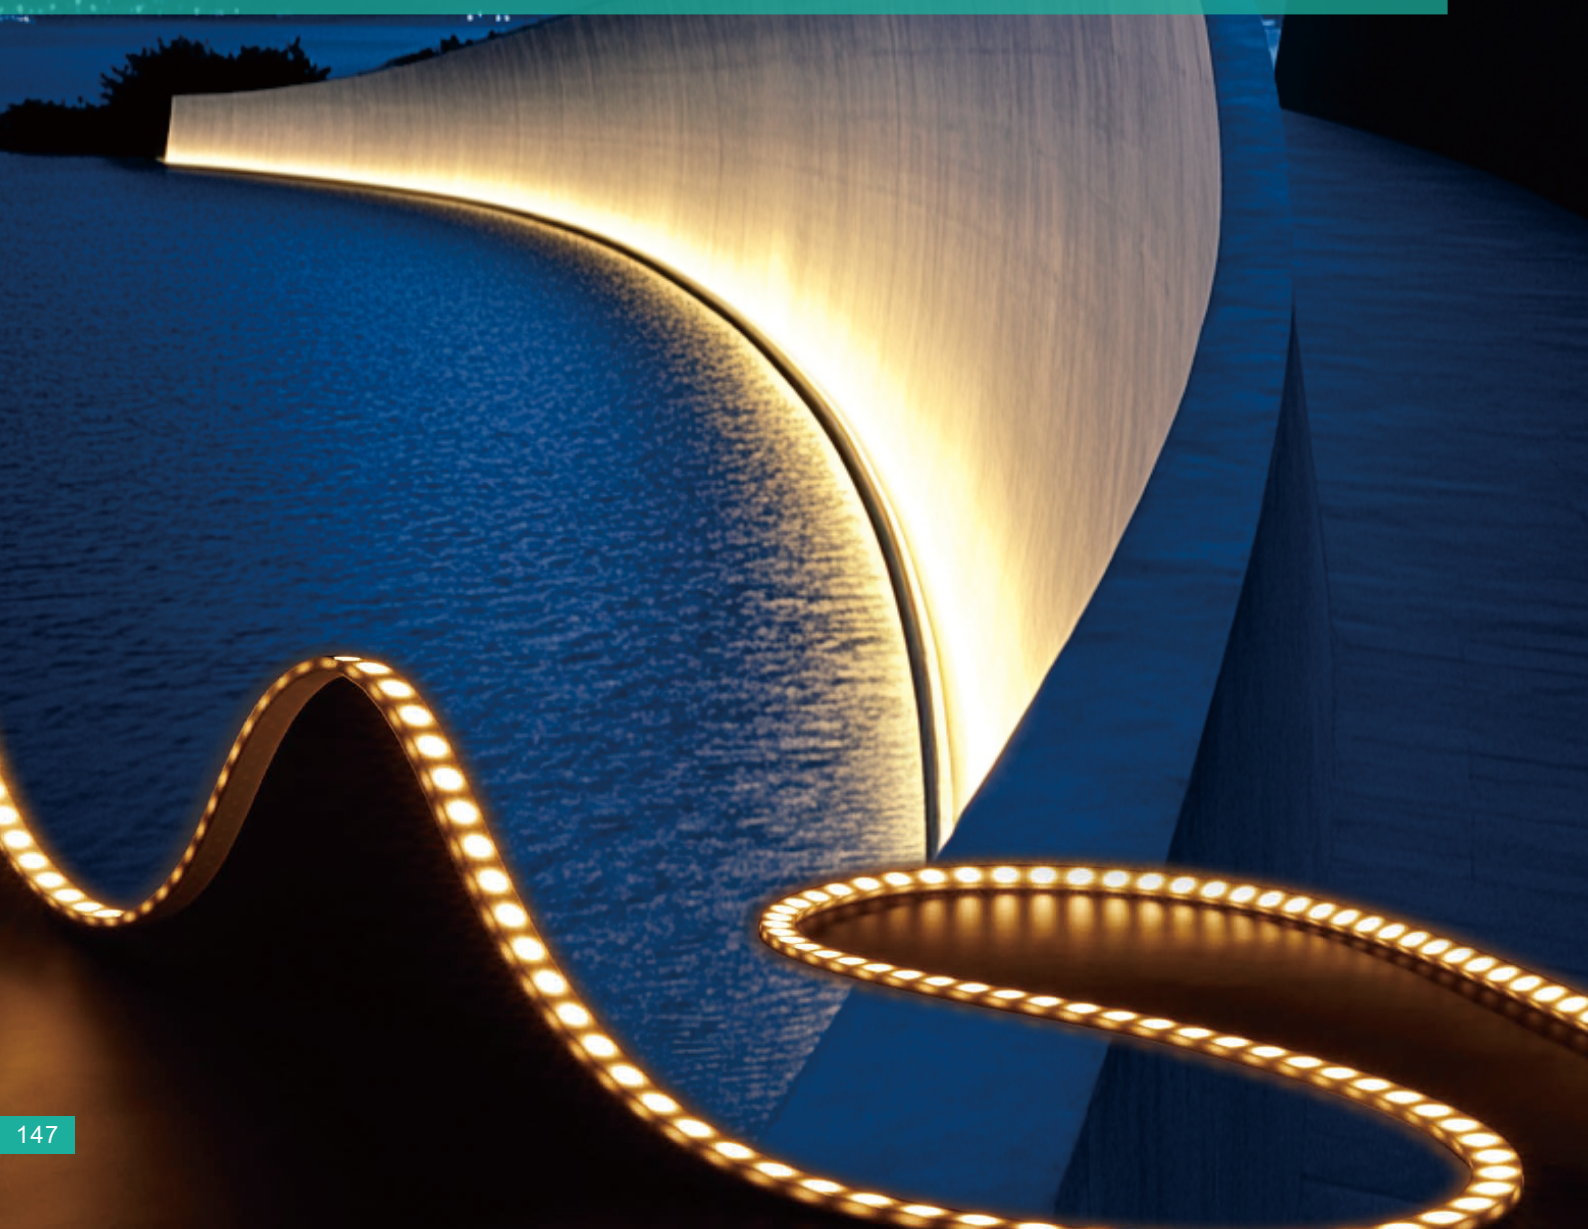

Flexible Wall washer

Freely bend, Multiple lens angles to choose from, anti-glare emitting design, max 3m washing height.



IP68

Full PU encapsulation technology, LED&PCB fully sealed.



Free Cutting


One LED one section, freely customize length, more accurate length for site installation.



3D Bending

Unique PCB chain design , effectively protect PCB and allow vertical bending and horizontal Bending and large bending diameter.

BENDING DIAGRAM

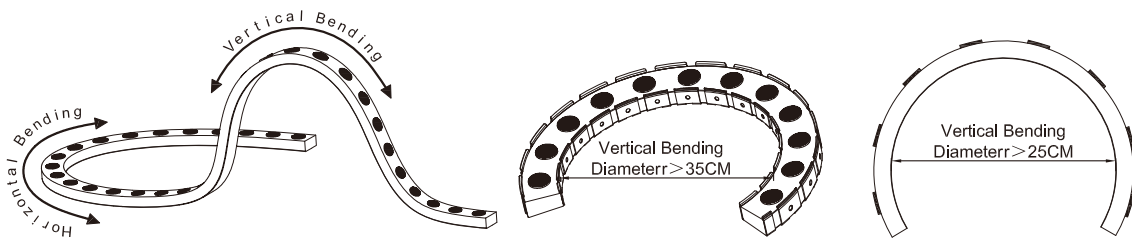

PRODUCT PARAMETERS

Model	NEON/P2212-WW	NEON/P1616-WW
Input	DC24V	
LED/M	36pcs/M	
M/Reel	5M/Reel	
LED type	SMD	
CRI	>90	
IP rating	IP68	
Power	18W/M	14W/M
Lumen/M	1300 lm/M@3000K	1000 lm/M@3000K
Pixel/m	30Pixel/m(DMX)	-
BA		
CCT		



COMPATIBILITY

NEON/P2212-WW

ON/OFF

0/1-10V

DALI

DMX512
Full color

DMX512
Pixel color

NEON/P1616-WW


ON/OFF

0/1-10V








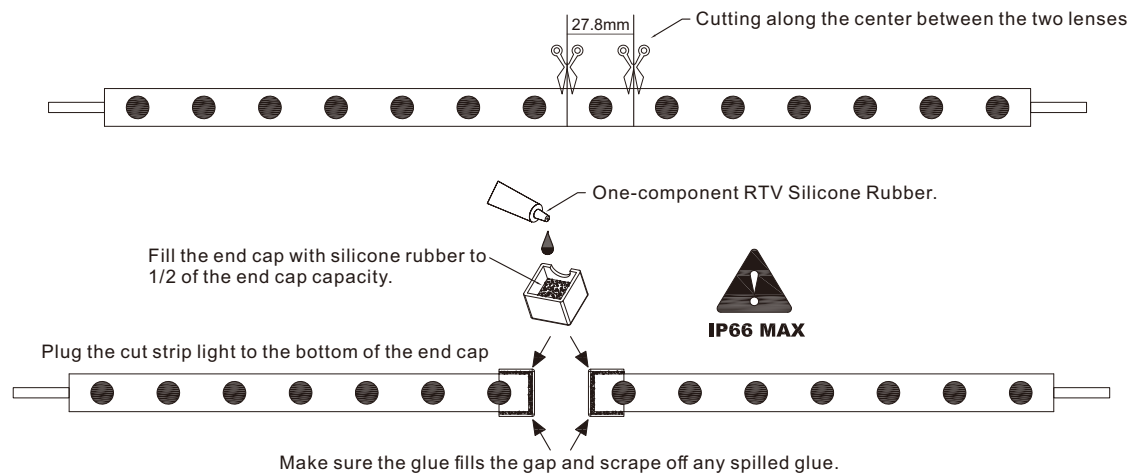




DALI

CUTTING AND SEALING

Attention: After cutting and bonding, the waterproofing will decrease and cannot be used underwater anymore!
Please refer to the following method to bond the end cap, and the maximum waterproofing can reach IP66.



INSTALLATION ACCESSORIES

Category	Model	Description	Picture
NEON/P2212-WW	Alu straight Profile for P2212	AL6063 Size: 1000x23.6x17.6mm. With 3 screw holes.	
	Alu straight Profile with Anti Glare baffle for P2212	AL6063 Size: 1000x23.6x42.6mm. With 3 screw holes.	
	Alu flexible Profile for P2212	AL6063 Size: 1000x23.6x17.6mm. With 4 screw holes.	
	Alu flexible Profile with Anti Glare baffle for P2212	AL6063 Size: 1000x23.6x42.6mm. With 4 screw holes.	
NEON/P1616-WW	Alu straight Profile for P1616	AL6063 Size: 1000x19x21.5mm	
	flexible Profile for P1616	SUS304 Size: 1000x16.69x15.5mm	
NEON/P2020-WW/ NEON/P1616-WW	Adjustable Braket for P2212/P1616	SUS304 Size:25.5x28.5x38.5mm, with 304 M3 screws.	
Cutting Accessory	Special scissors	Ensure the smoothness of the cutting surface	
	Glue for NEON PREMIUM	Kafuter K-5905	
	Wire for NEON PREMIUM	2x0.5mm ² , Outer diameter of the wire is 5mm.	
	Input cap	Input cap for P2212 Input cap for P1616	
	End cap	End cap for P2212 End cap for P1616	

RECOMMEND MOUNTING DISTANCE

