


IK10 3D bending LED Flex Neon light

ROCK1408

Can be bent on the vertical and horizontal .
Using Blending modified engineering plastics, excellent waterproof and weather resistance.
Suitable for long-term use in a variety of harsh environments, such as swimming pool,
underwater (seawater), riverbank, etc.



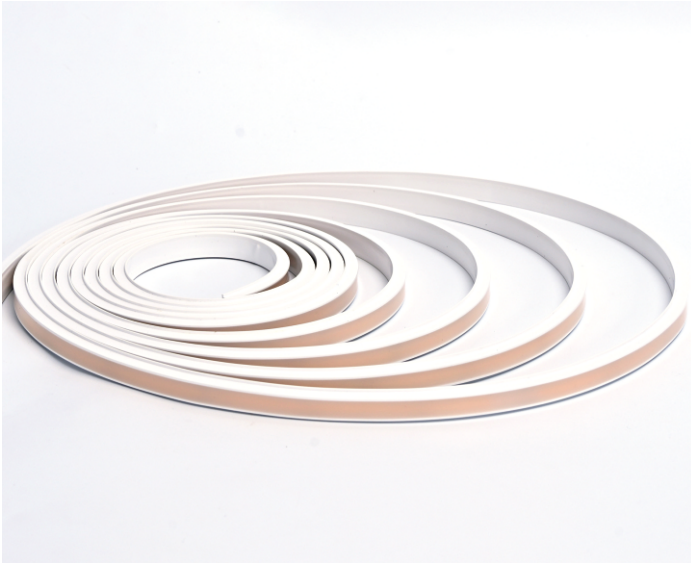

IP68

One-piece molding technology is used to prevent water vapor intrusion.



IK10

Test according to IEC 62262:2002, high impact protection rating Ik10(20J), effectively reducing maintenance costs and workload.



Modified PVC

With the highest protection level, anti-UV, anti-corrosion. not easy to yellow, no cracking. Good weather resistance.




Dotless

Uniform light emission, no dark areas.



3D Bending

Unique PCB chain design, effectively protect PCB and allow vertical bending and horizontal Bending, the bending radius is not limited.

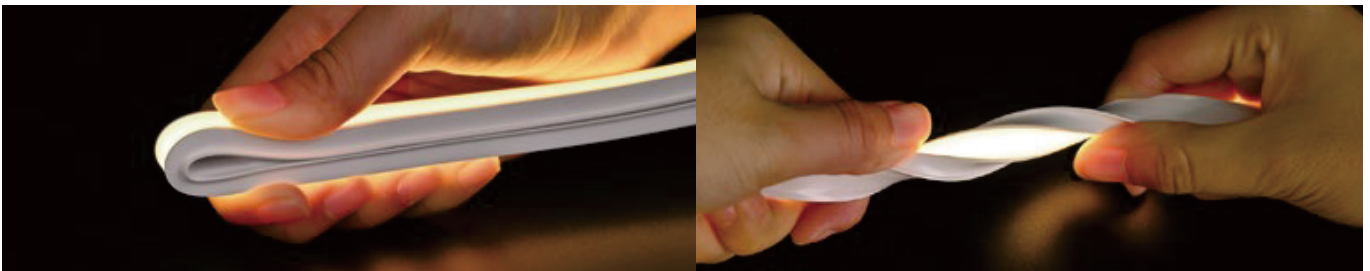

The bending radius is not limited.

PRODUCT PARAMETERS

Model	ROCK1408
Input	DC24V
LED/M	320pcs/M
M/Reel	5M/Reel
LED type	COB
CRI	>80
IP rating	IP68
Power	10W/M
Lumen/M	341 lm/M@3000K
CCT	2200K 3000K 4000K 6500K

COMPATIBILITY

ON/OFF

Triac

0/1-10V

DALI

PWM

INSTALLATION ACCESSORIES

SUS 316L Clip

Size: 14.6x12.3mm

