

SMD Strip

VALUE101

One LED one cut, convenient for installation
LED Ambient and decorative lighting solution, widely used in indoor cove,
cornice and various secondary reflection applications.





One led one cut

Less cutting distance, more free installation.



R2R

Reel-to-reel PCB, no solder joints for whole reel.



Double ended power input


Both ends are equipped with input wires. Friendly to use after cutting.



Double layer FPC

Balancing the voltage dropping, heat dissipation and flexibility.

DIMENSIONS

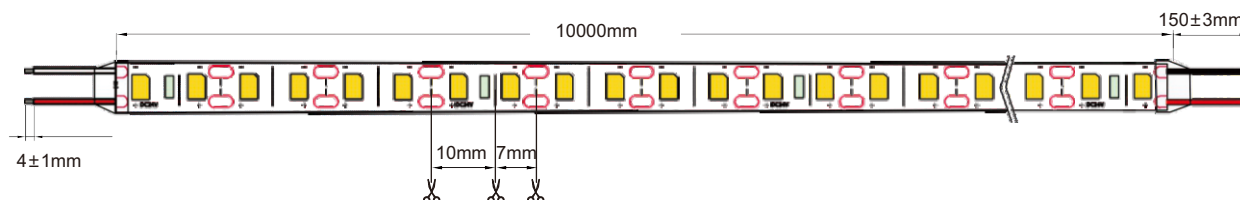

PRODUCT PARAMETERS

| Model | VALUE101 |
|-----------|---|
| | |
| Input | DC24V |
| LED/M | 120pcs/M |
| M/Reel | 10m(IP20) / 5m(IP65) |
| LED type | SMD |
| CRI | >90 |
| IP rating | IP20/IP65 |
| Power | 10W/M |
| Lumen/M | 850 lm/M@3000K |
| CCT | <div style="display: flex; justify-content: space-around;"> 2700K 3000K </div> <div style="display: flex; justify-content: space-around;"> 4000K 6500K </div> |

COMPATIBILITY

ON/OFF

Triac

0/1-10V

DALI

PWM

IP RATING

| IP | IP20 | IP65 |
|----------|------|--------------------------|
| Section | | |
| Material | None | Inject with Silicon tube |

* The IP65 will lead to a 5% brightness/efficiency drop.

