

COB Strip

VALUE201

COB strip light, widely used in indoor cove, cornice and various secondary reflection applications. Especially for narrow spaces less than 10mm height with its dotless feature.





Dotless

Uniform light emission, no dark areas.



R2R

Reel-to-reel PCB, no solder joints for whole reel.



Double ended power input


Both ends are equipped with input wires. Friendly to use after cutting.



Double layer FPC

Balancing the voltage dropping, heat dissipation and flexibility.

DIMENSIONS

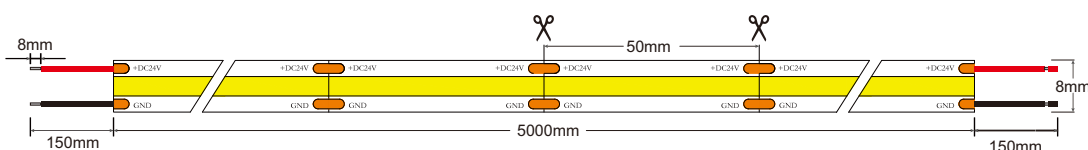

PRODUCT PARAMETERS

| Model | VALUE201 |
|-----------|---|
| | |
| Input | DC24V |
| LED/M | 480pcs/M |
| M/Reel | 5M/Reel |
| LED type | COB |
| CRI | >90 |
| IP rating | IP20/IP65 |
| Power | 10W/M |
| Lumen/M | 900 lm/M@3000K |
| CCT | <div style="display: flex; justify-content: space-around;"> 2700K 3000K </div> <div style="display: flex; justify-content: space-around;"> 4000K 6500K </div> |

COMPATIBILITY

ON/OFF

Triac

0/1-10V

DALI

PWM

IP RATING

| IP | IP20 | IP65 |
|----------|------|--------------------------|
| Section | | |
| Material | None | Inject with Silicon tube |

* The IP65 will lead to a 5% brightness/efficiency drop.

