

# ESP183 CCT ESP184 CCT



### APPLICATIONS

Hotel, Restaurant, Villa,  
Toilet, area with lower ceiling

### CONSTRUCTION

- Die-casting Aluminum Body
- Deep Anti-Glare Reflector
- Flicker Free LED drivers
- CCT selectable Switch

### TECHNICAL DETAILS

- High CRI COB LEDs
- Rated life: 50,000 hours

### OPTIONS



- Three colors of reflector available: full white, white & black, white & golden
- On-off is available.
- Dali & 0/1-10V are customized.



### REFLECTOR COLOR OPTION




### DIMENSION




Model	Input	Power	Reflector	CCT	Lumen@4000K	CRI	Price(USD)
ESP183 CCT	220-240V	12W	White	3000K+4000K+5000K	863lm	≥92	55.8USD
ESP183 CCT	220-240V	12W	White+Black	3000K+4000K+5000K	848lm	≥92	55.8USD
ESP183 CCT	220-240V	12W	White+Golden	3000K+4000K+5000K	855lm	≥92	55.8USD
ESP183 CCT	220-240V	12W	Black	3000K+4000K+5000K	848lm	≥92	55.8USD
ESP184 CCT	220-240V	20W	White	3000K+4000K+5000K	1623lm	≥92	67USD
ESP184 CCT	220-240V	20W	White+Black	3000K+4000K+5000K	1593lm	≥92	67USD
ESP184 CCT	220-240V	20W	White+Golden	3000K+4000K+5000K	1600lm	≥92	67USD

Remarks: The beam angle highlighted is available. Others are optional.


**PHOTOMETRIC DATA**

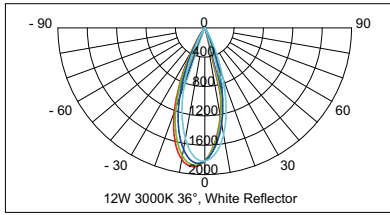


1m	1202	65.1
2m	300.4	130.3
3m	133.5	8
4m	75.1	195.5
5m	48.0	260.7
	(lx)	(cm)

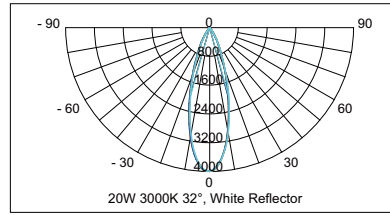


1m	2665	55.1
2m	666.3	110.2
3m	296.1	165.3
4m	166.6	220.4
5m	106.6	275.5
	(lx)	(cm)

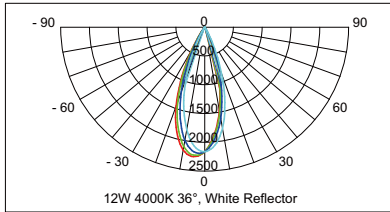


1m	1436	65.7
2m	358.9	131.5
3m	159.5	197.2
4m	89.7	263.0
5m	57.4	328.7
	(lx)	(cm)

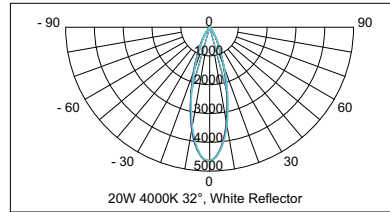

1m	3097	55.4
2m	774.2	110.9
3m	344.1	166.4
4m	193.6	221.9
5m	123.9	277.4
	(lx)	(cm)

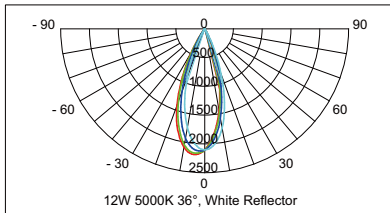

1m	1397	65.3
2m	349.2	130.7
3m	155.2	196.0
4m	87.2	261.4
5m	55.8	326.7
	(lx)	(cm)

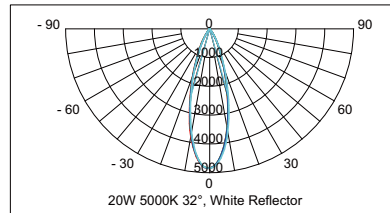

1m	3235	55.1
2m	808.6	110.3
3m	359.4	165.5
4m	202.2	220.7
5m	129.4	275.9
	(lx)	(cm)

**Application**

