


**EWM5506**  
**EWM5507**





EWM5506

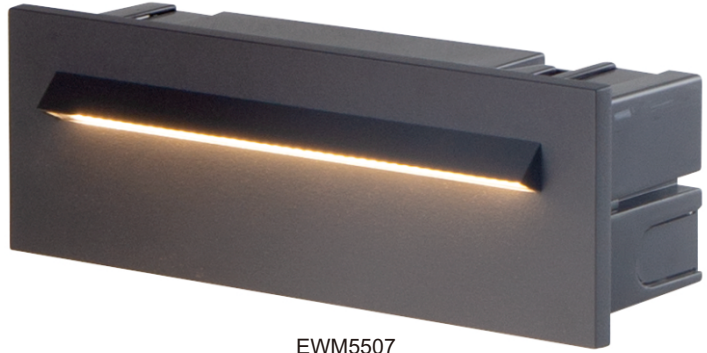

EWM5507

# EWM5506 EWM5507



### APPLICATIONS

- Lawns and gardens
- Paths
- Parking areas


### CONSTRUCTION

- Die-casting aluminum
- Clear polycarbonate diffuser
- Polyester powder coating
- Silicone gasket
- Stainless steel screws
- Body color: Graphite (RAL7024)


### TECHNICAL DETIALS

- PF: 0.77(EWM5506) / PF: 0.9(EWM5507)
- LED source: Lumileds 4014
- LED source quantity: 12(EWM5506) / 42(EWM5507)
- Driver: KGP-KEDW004S035NR41A7(EWM5506)  
KGP-CC6W350A29(EWM5507)
- Rated life: 50,000 hours
- Operating Temp: -20°C~+55°C

### PHOTOMETRIC CURVES


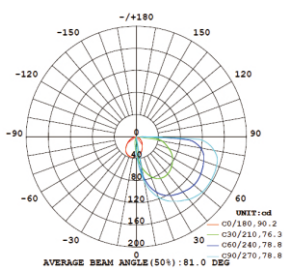


EWM5506

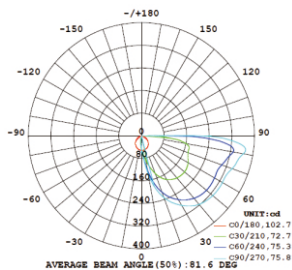

EWM5507

### DIMENSION

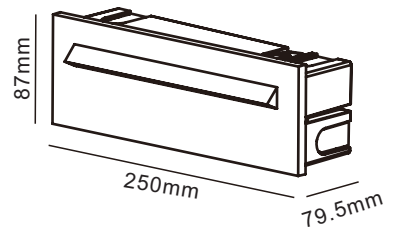

Model	Input	Power	CCT	Lumen	CRI	BA
EWM5506	220-240V	4W	3000K	303lm	>80	80°
EWM5507	220-240V	7W	3000K	663lm	>80	80°