



BEAM* CCT

DOWN LIGHT




APPLICATIONS

- Shopping malls
- High ceiling
- Exhibition hall
- Hotel
- Warehouse

CONSTRUCTION


- Iron housing
- PC diffuser with even light output
- With separate driver
- 3-CCT selectable via driver
- IP: IP20 / IP44(optional)

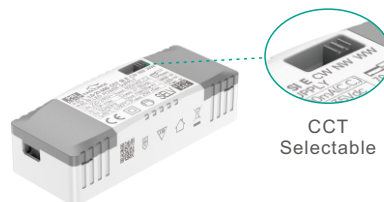


TECHNICAL DETIALS

- SMD LEDs
- Rated life: 50,000 hours

PHOTOMETRIC CURVES



DIMENSION

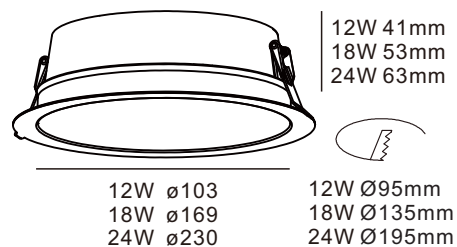

Model	Input	Power	CCT	Lumen	CRI	BA
BEAM4 CCT	220-240V	12W	3000K+4000K+6500K	1200lm	>80	100°
BEAM6 CCT	220-240V	18W	3000K+4000K+6500K	1900lm	>80	100°
BEAM8 CCT	220-240V	24W	3000K+4000K+6500K	2600lm	>80	100°