



Power and CCT adjustable



NFD276 CCT
75W+115W+150W



NFD276 CCT
125W+190W+250W



Power and CCT
adjustable

NFD276 CCT

FLOOD LIGHT



APPLICATIONS

- Gardens & lawns
- Parks & plazas
- Building facades
- Sculptures


CONSTRUCTION

- Die-cast aluminum housing
- Tempered glass
- Body color: Black (RAL9017)


TECHNICAL DETAILS

- Power and CCT adjustable
- SDCM≤5
- Driver included
- Rated life: 50,000 hours
- Operation temp: -20°C~+55°C


PHOTOMETRIC CURVES



DIMENSION

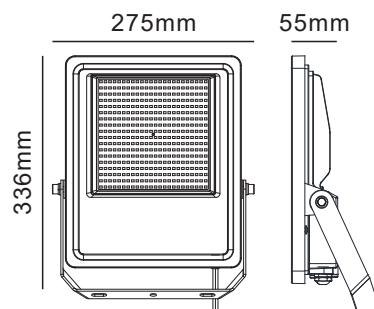

NFD276 CCT
75W+115W+150W

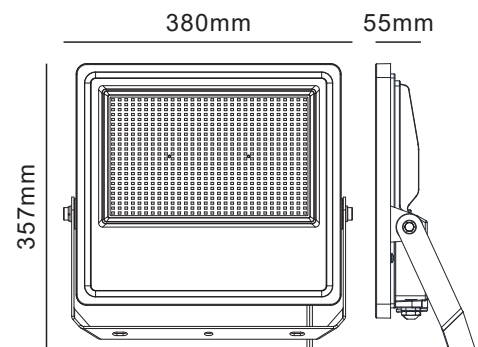

NFD276 CCT
125W+190W+250W

Model	Input	Power	CCT	Max Lumen	CRI	BA
NFD276 CCT	220-240V	75W+115W+150W	3000K+4000K+5000K	23500lm	>70	110°
NFD276 CCT	220-240V	125W+190W+250W	3000K+4000K+5000K	40000lm	>70	110°



NFD276L 150W



NFD276L 250W

NFD276L

FLOOD LIGHT



APPLICATIONS

- Gardens & lawns
- Parks & plazas
- Building facades
- Sculptures


CONSTRUCTION

- Die-cast aluminum housing
- Tempered glass+lens
- Body color: Black (RAL9017)


TECHNICAL DETAILS

- SDCM≤5
- Driver included
- Rated life: 50,000 hours
- Operation temp: -20°C~+55°C


PHOTOMETRIC CURVES

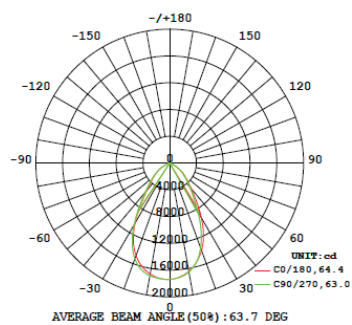

DIMENSION

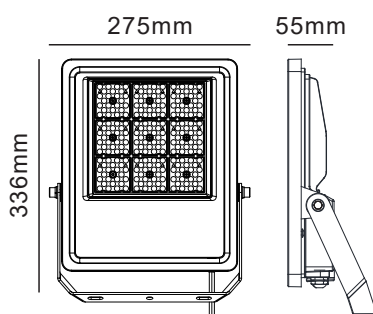

NFD276L 150W

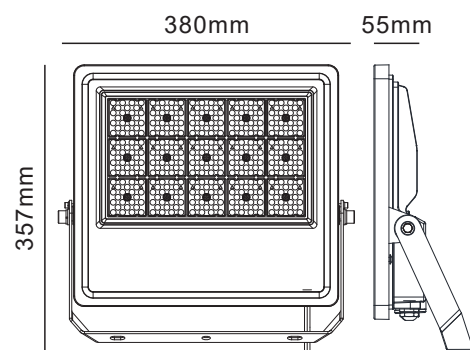

NFD276L 250W

Model	Input	Power	CCT	Lumen	CRI	BA
NFD276L	220-240V	150W	3000K/4000K/5000K	22000lm	>70	30°/60°/90°
NFD276L	220-240V	250W	3000K/4000K/5000K	36000lm	>70	30°/60°/90°