





WELL*

SPOT LIGHT



APPLICATIONS

- Hotel
- Villa
- Corridors
- Residential

CONSTRUCTION

- Die-cast aluminium housing and PC reflector
- Adjustable: Rotation 355°, tilt 0-30°

OPTIONAL

* This optical design reduces luminous efficacy by about 20%.




Small circular hole

Elliptical hole


TECHNICAL DETAILS

- COB LEDs+lens
- Flicker free LED driver
- Rated life: 50,000 hours

PHOTOMETRIC CURVES



DIMENSION

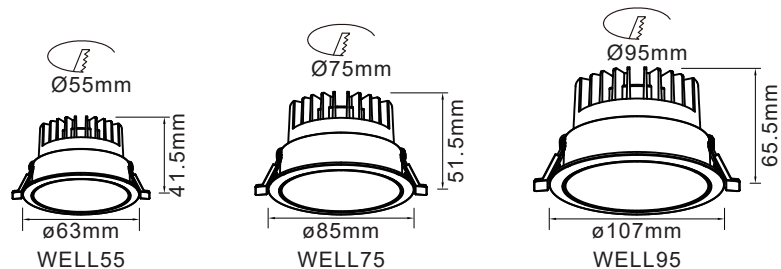

Model	Input	Power	CCT	Lumen	CRI	BA
WELL55	220-240V	7W	3000K/4000K/5000K	600lm	>90	24°/36°
WELL75	220-240V	12W	3000K/4000K/5000K	1100lm	>90	24°/36°
WELL95	220-240V	18W	3000K/4000K/5000K	1600lm	>90	24°/36°