

ARC*





ARC*



APPLICATIONS

- Hotel
- Bathrooms
- Corridors
- Canopy


CONSTRUCTION

- Die-casting aluminum housing
- Curved design for a cleaner, trimless appearance


TECHNICAL DETAILS

- SMD LEDs with lens
- Flicker-free external driver
- Rated life: 50,000 hours

PHOTOMETRIC CURVES



DIMENSION

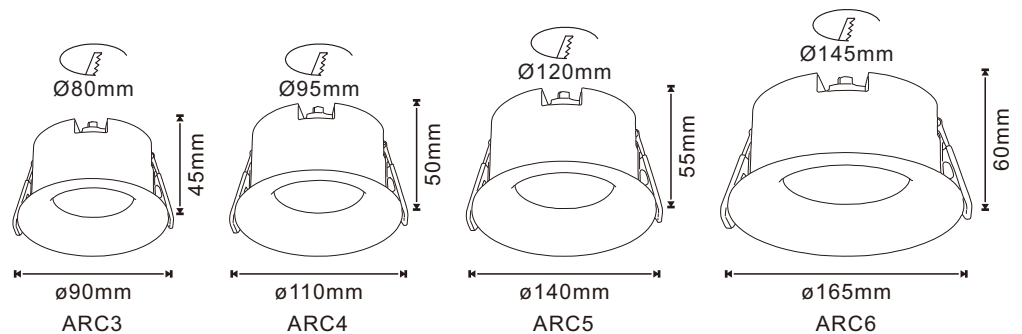

Model	Input	Power	CCT	Lumen	CRI	BA
ARC3	220-240V	10W	3000K/4000K/5700K	700lm	>95	50°
ARC4	220-240V	15W	3000K/4000K/5700K	1050lm	>95	50°
ARC5	220-240V	20W	3000K/4000K/5700K	1400lm	>95	50°
ARC6	220-240V	30W	3000K/4000K/5700K	2100lm	>95	50°