





Track Connection

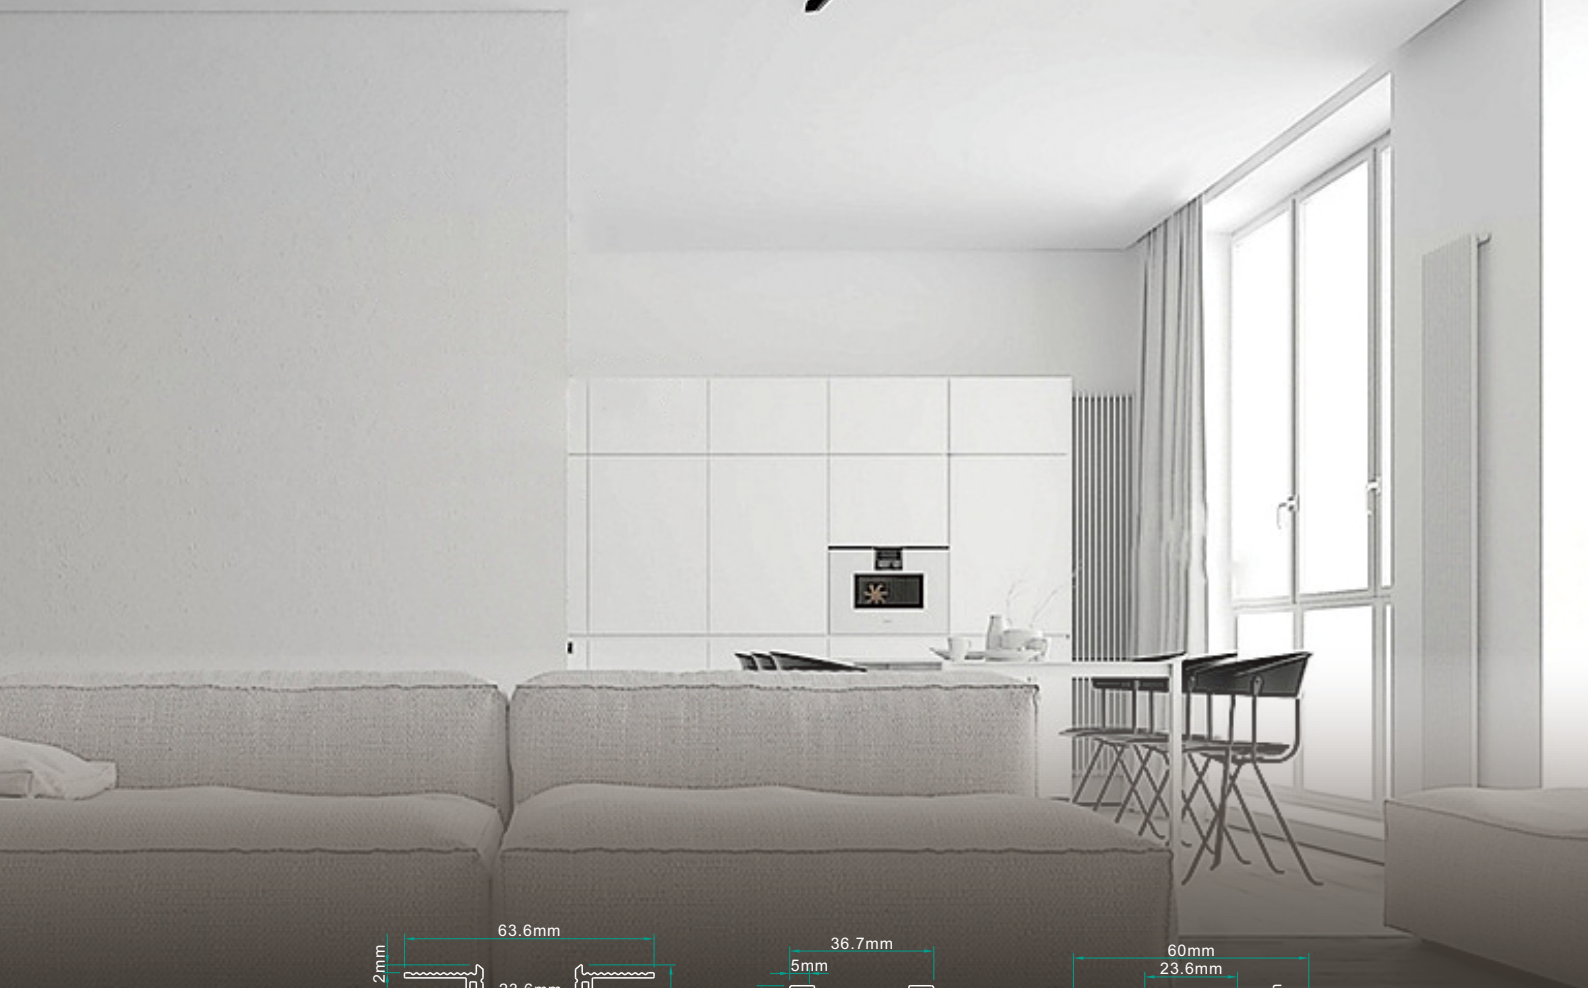


EMT20A-SMT3000



EMT20A-PT1000
EMT20A-PT3000




EMT20A-RMT3000

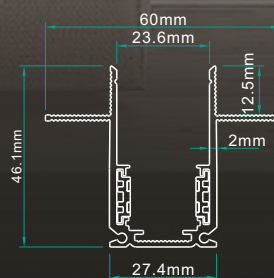

EMT20A-SFT1000
EMT20A-SFT3000

Surface mounted track

EMT20A-SMT3000(3M)

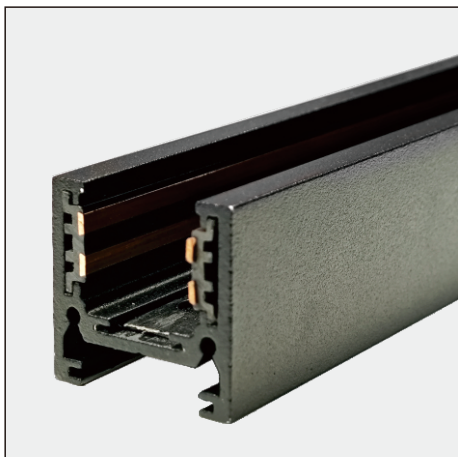

Product size

3000*27.1*26.8 mm

Voltage


DC48V




EMT20A-SMT-
End cap





EMT20A-SMT-
L Joint



EMT20A-SMT-
Suspension kit
(1.5m)



EMT20A-SMT/RMT-
Linear connector




Short Info


- 48V low voltage system;
- Insets available with Non Dim, 1-10V Dim and DALI Dim;
- 1.8mm thickness, ultra-strong Alu profile for maximum resistance against compression and deformation;
- Thickened copper conductive sheet ensure lifetime conductivity with no adverse effects;

Installation

Surface mounted

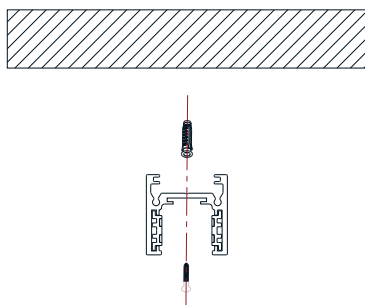

Suspended

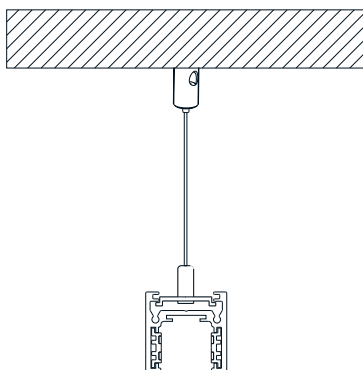

Plastering track

EMT20A-PT1000(1M)

Product size	Voltage
1000*63.6*46.9 mm	DC48V

EMT20A-PT3000(3M)


Product size	Voltage
3000*63.6*46.9 mm	DC48V



Note:
This is a pre-embedded press plate track.
The track needs to be brought to the site before the ceiling suspension work is started






EMT20A-PT/SFT-
End cap



EMT20A-PT-
L Joint




EMT20A-PT-
T Joint

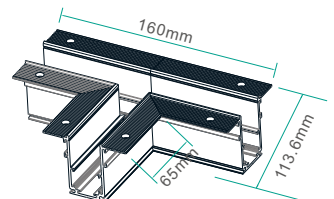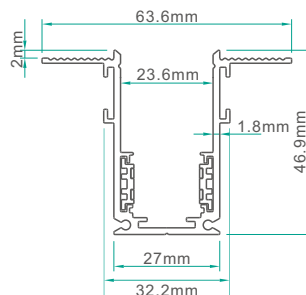

Short Info

- 48V low voltage system;
- Insets available with Non Dim, 1-10V Dim and DALI Dim;
- 1.8mm thickness, ultra-strong Alu profile for maximum resistance against compression and deformation;
- Thickened copper conductive sheet ensure lifetime conductivity with no adverse effects;

Installation

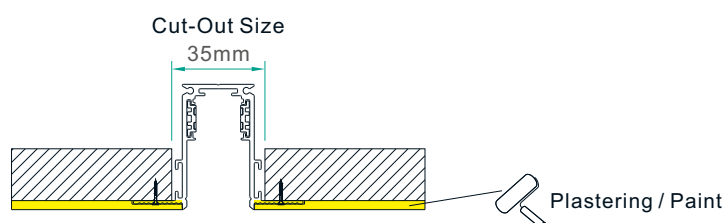

Attention: In order to prevent wall cracking, fiberglass mesh needs to be hung before plastering

Recessed mounted track

EMT20A-RMT3000(3M)




Product size


3000*39.7*50.35 mm

Voltage


DC48V



EMT20A-RMT-
Fixing clip




EMT20A-RMT-
L Joint






EMT20A-RMT-
T Joint



EMT20A-RMT-
End cap




EMT20A-SMT/RMT-
Linear connector

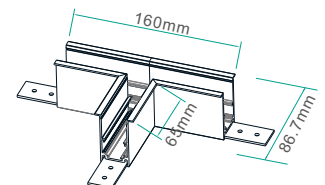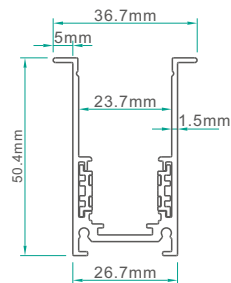

Short Info

- 48V low voltage system;
- Insets available with Non Dim, 1-10V Dim and DALI Dim;
- 1.5mm thickness, ultra-strong Alu profile for maximum resistance against compression and deformation;
- Thickened copper conductive sheet ensure lifetime conductivity with no adverse effects;

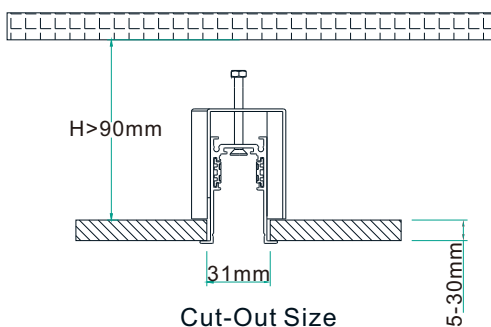

Platen-Supported Fixed Track

EMT20A-SFT1000(1M)

Product size	Voltage
1000*60*46.1 mm	DC48V

EMT20A-SFT3000(3M)

Product size	Voltage
3000*60*46.1 mm	DC48V




Note:
This is a pre-embedded press plate track.
The track needs to be brought to the site before the ceiling
suspension work is started




EMT20A-PT/SFT-
End cap






EMT20A-PT-
L Joint



EMT20A-PT-
T Joint




EMT20A-SMT/RMT-
Linear connector

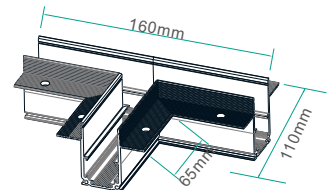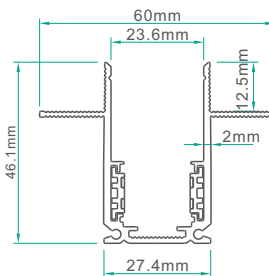

Short Info


- 48V low voltage system;
- Insets available with Non Dim, 1-10V Dim and DALI Dim;
- 2mm thickness, ultra-strong Alu profile for maximum resistance against compression and deformation;
- Thickened copper conductive sheet ensure lifetime conductivity with no adverse effects;

Installation

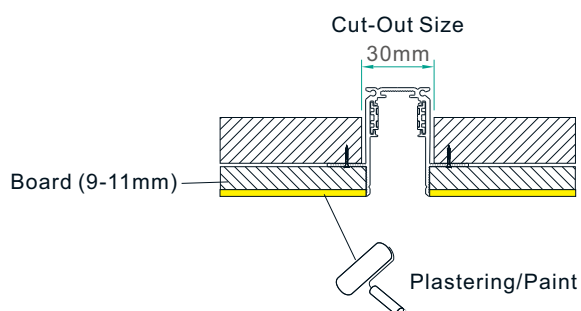





Electrical continuous kit





EMT20A-Input conductor



EMT20A-Straight connector

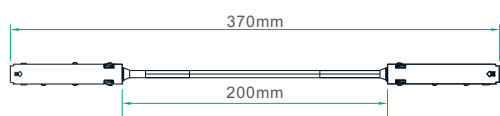

EMT20A-L-Flexible connector

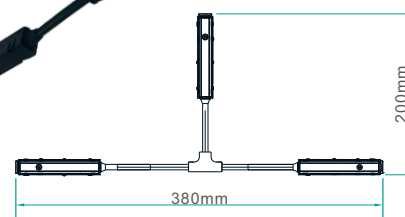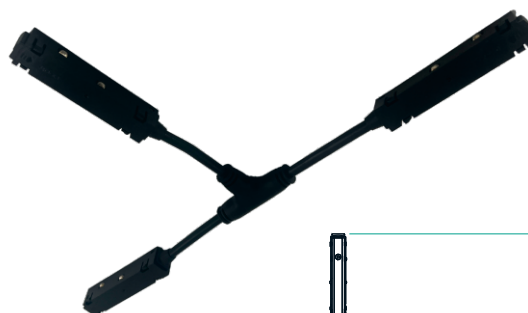

EMT20A-T-Flexible connector