LED Module Light

MODULE101
MODULE102
MODULE103
MODULE104

IP66 rated LED modules, a string can provide up to 100pcs LED modules, ideal backlit lighting solution for various showrooms or stretch ceiling, or exterior advertising light box and letters with at least 10cm depth.











Large angle
175 ° wide-angle lens.

IP66
Applicable for general exterior use.

Cuttable
Single module cuttable, support customization.

High brightness
High light efficiency, 100lm/W.

DIMENSIONS

MODULE101

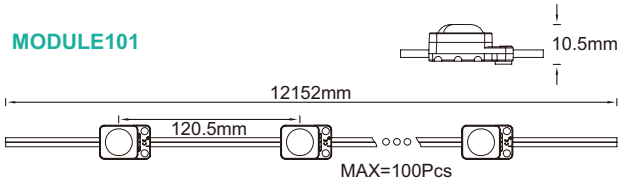

MODULE102

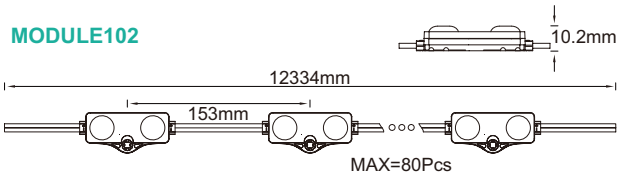

MODULE103

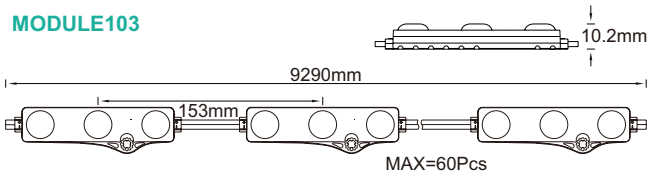

MODULE104

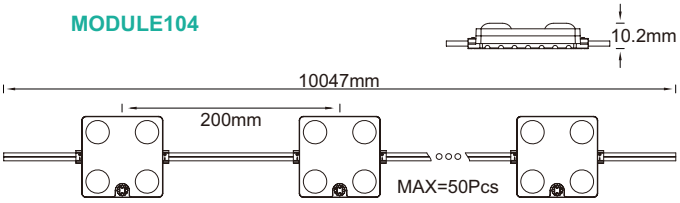

PRODUCT PARAMETERS

Model	MODULE101	MODULE102	MODULE103	MODULE104
				
Input	DC24V			
LED/Pc	1pc	2pcs	3pcs	4pcs
LED type	SMD			
IP rating	IP66			
Power	0.36W/Pc	0.72W/Pc	1.08W/Pc	1.44W/Pc
Lumen/Pc	52 lm@3000K	101 lm@3000K	156 lm@3000K	209 lm@3000K
CCT	3000K 4000K 5000K 6000K 7000K 10000K			



COMPATIBILITY

ON/OFF | Triac | 0/1-10V | DALI | PWM

INSTALLATION

Model No	Surface Material	Depth(H)cm	Illumination(lux)	Evenness	Density (pcs/m²)	Spacing (X*Y)cm	Power Density (W/m²)	Visual Effects
MODULE103	White Soft Film	12	7010-7830	0.90	10*15	10*5	165	OK
		14	4693-5070	0.93	10*15	10*5	165	
		16	3400-3830	0.89	8*10	12.5*10	88	
		18	3018-3290	0.92	6*8	15*12	53	
MODULE104	White Soft Film	10	9438-10220	0.92	10*10	10*10	144	OK
		12	7825-8370	0.93	10*10	10*10	144	
		14	5470-5940	0.92	8*8	12.5*12.5	92	
		16	4095-4420	0.93	7*7	15*15	71	
		18	3113-3460	0.90	6*6	17.5*17.5	52	



Note:
1. X indicates the horizontal center spacing between modules.
2. Y indicates the longitudinal center spacing between modules.
3. Single LED modules are arranged in a square, X=Y.
4. When the depth of lightbox H>18cm, use more products to satisfy Illumination demand.
5. The wire length can be customized.
6. Please ask the sales for more info.


Sale da pranzo
Toilette
Internet Point
Guardaroba
Ascensore
Scale
Suite
Wellness
Beauty
Garage
1F
D6
D5
D4
D3
D2
D1
D-1